

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



The  
Patent  
Office

PCT/GB 99 / 03304  
30 NOVEMBER 1999

INVESTOR IN PEOPLE

6399/3984

6

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales

NP10 8QQ REC'D 13 JAN 2000
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew Gorse*

Dated 13 December 1999

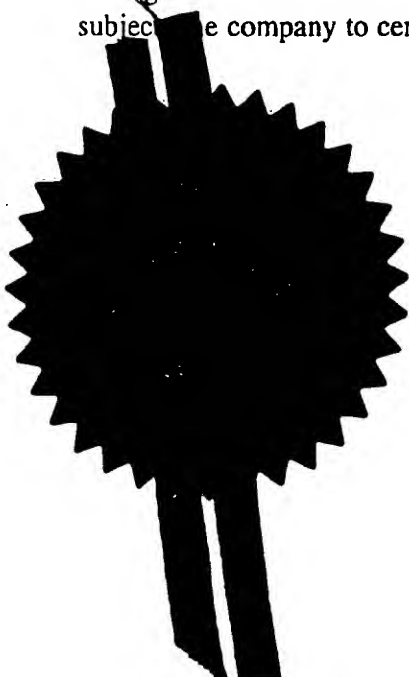

02DEC98 E408669-1 D02827

000000.00 - 9826293.4

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

F

- 1 DEC 1998

RULE 57

RECEIVED BY POST

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

## 1. Your reference

4575F/JAK

## 2. Patent application number

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

PILKINGTON PLC  
PRESCOT ROAD  
ST HELENS  
MERSYESIDE WA10 3TT

Patents ADP number (if you know it)

0444091001 ✓

If the applicant is a corporate body, give the country/state of its incorporation

00660449001  
ENGLAND

## 4. Title of the invention

IMPROVEMENTS IN COATING GLASS

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ANTHONY CHARLES HALLIWELL  
GROUP PATENTS DEPARTMENT  
PILKINGTON TECHNOLOGY CENTRE  
PILKINGTON PLC  
HALL LANE  
LATHOM  
ORMSKIRK L40 5UF  
LANCASHIRE

Patents ADP number (if you know it)

0626497001 ✓

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or


c) any named applicant is a corporate body.

See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description	11
 Claim(s)	6
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

## Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature 

Date 27 Nov '98.

ANTHONY CHARLES HALLIWELL (AGENT FOR THE APPLICANT)

12. Name and daytime telephone number of person to contact in the United Kingdom MR J A KNOWLES  
Tel. 01695 54391

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Improvements in Coating Glass.

This invention relates to a process for the production of a heat-treatable low emissivity coated glass and to a heat-treatable low emissivity coated glass.

It is known that transparent glass substrates with a thin reflective metal coating, typically silver 5 nm to 30 nm thick, may be produced with low emissivity and a high visible light transmission i.e. which reflect a high proportion of infra-red radiation incident upon them but allow visible radiation to pass through. The use of such coatings on window glass leads to a reduction in heat loss. For optimum light transmission, the silver layers are sandwiched between thin anti-reflection layers of metal oxide. Such low emissivity coatings are produced by vacuum deposition processes, especially sputtering, and normally comprise a thin layer of silver sandwiched between two layers of metal oxide. Such coatings are described, for example, in UK patent specification GB 2 129 831.

Unfortunately, such low emissivity coatings are not stable to heating in air, and the coating loses its properties of low emissivity and high light transmission when the coated glass is subjected to a thermal cycle which cycle is required for bending or toughening the glass. To obtain a toughened or bent glass substrate bearing a low emissivity reflective metal coating that has high light transmission it has been necessary to either bend and/or toughen the glass before depositing the reflective metal coating or to deposit an additional, protective layer over the reflective metal layer before bending/toughening. GB patent 2 186 001B describes this problem and a process for the production of a bent and/or toughened silver coated glass substrate wherein an additional metal layer of aluminium, titanium, zinc or tantalum is deposited over the silver layer. The additional metal layer protects the silver layer beneath it from degradation during the bending or

toughening thermal cycle by acting as a barrier layer between the silver layer and the oxidising atmosphere.

The applicants have now discovered that the above problem may be alleviated by depositing an underlayer onto a glass substrate using a pyrolytic deposition process and subsequently depositing a reflective metal layer onto the coated substrate.

According to one aspect of the present invention there is provided a process for the production of a heat-treatable low emissivity coated glass that comprises the steps of

a) depositing an underlayer onto a glass substrate, and

b) subsequently depositing a reflective metal layer by a vacuum deposition method, characterised in that the underlayer is deposited by a pyrolytic deposition process. Surprisingly, the underlayer deposited by a pyrolytic deposition process provides protection to the reflective metal layer on heat-treatment despite its position *underneath* the reflective metal layer. In preferred embodiments of the invention, a barrier layer is unnecessary but a barrier layer may be deposited if so desired.

Normal emissivity is defined in International Standard ISO 12092:1994 (F), Annex A as  $\epsilon_N = 1 - R_N$  where  $R_N$  is the normal reflectance over the wavelength range 5.5  $\mu\text{m}$  to 50  $\mu\text{m}$  at 283 K. Low emissivity coatings as discussed herein are those which have a normal emissivity of below about 0.4. The lower the emissivity of the coated glass the better is the heat rejecting properties of the glass.

Usually, the reflective metal layer is deposited directly on the underlayer, but one or more intermediate layers (e.g. of metal oxide) may be deposited between the underlayer and the reflective metal layer if, for example it is desired to deposit an anti-reflection layer

or anti-reflection layers additional to the underlayer. Layers may also be deposited beneath the underlayer.

Pyrolytic deposition processes are processes which are usually carried out at substantially atmospheric pressure wherein a fluid is directed onto a hot substrate under conditions such that a coating is formed on the substrate. Processes wherein the fluid is a liquid are termed spray deposition processes and processes wherein the fluid is a vapour are termed chemical vapour deposition processes.

It is thought that any pyrolytically deposited material could be advantageously used as an underlayer in the present invention. For example, the underlayer may comprise silicon oxide, silicon oxide containing carbon (often referred to as silicon oxycarbide and which may be deposited as described in European patent application 275 662 A), silicon oxide containing nitrogen (often referred to as silicon oxynitride and which may be deposited as described in GB patent 2 031 756 B), titanium oxide, tin oxide, titanium nitride, silicon nitride, silicon carbide, silicon or a mixture comprising one or more of these materials.

If silicon oxide is selected as the underlayer material, pyrolytically depositing the underlayer preferably comprises contacting the glass substrate with a fluid mixture containing a silicon source, an oxygen source and a carbon source under conditions such that a silicon oxide layer, preferably containing carbon, is deposited. Preferably, the fluid mixture is a vapour mixture.

The underlayer will usually be deposited on the glass substrate when the glass substrate is at a temperature in the range 450°C to 800°C, especially when the glass substrate is at a temperature in the range 600°C to 780°C.

Preferably, the underlayer is deposited on to a glass ribbon during the float glass production process at substantially atmospheric pressure in which case the glass ribbon will usually be cut into sheets after deposition of the underlayer (and before deposition of other layers including the reflective metal and any subsequent layers) for storage or convenient transport from the float glass production facility to the vacuum deposition facility.

The reflective metal layer preferably comprises silver or aluminium

A vacuum deposition process is one which is usually performed at a pressure of lower than about 0.1 mbar and includes such methods as sputtering, reactive sputtering, evaporation and other forms of physical vapour deposition. The preferred vacuum deposition method for depositing a reflective metal layer is sputtering.

Usually, an anti-reflection layer is deposited by a vacuum deposition process on to the coated glass after deposition of the reflective metal layer. Preferably, the anti-reflection layer comprises a metal oxide, more preferably the anti-reflection layer comprises zinc oxide or tin oxide. More than one anti-reflection layer may be deposited.

If an anti-reflection layer is deposited by reactive sputtering in an oxidising atmosphere comprising, for example, more than 70% by volume oxygen, a further protective layer is preferably deposited on the reflective metal layer before the sputtering step so as to protect the reflective metal layer from degradation by the oxidising atmosphere. The further protective layer preferably comprises inconel or nichrome. Other layers may also be deposited between the reflective metal layer and anti-reflection layer(s).



The invention also provides a process for the production of coated glass having a coating with more than one reflective metal layer. Thus, in an embodiment of the invention a second reflective metal layer and a second anti-reflection layer are sequentially deposited by a vacuum deposition process after deposition of the first anti-reflection layer. In this embodiment of the invention (where the coated glass has two reflective metal layers) the glass will usually have lower emissivity than in the single reflective metal layer embodiment and also, with appropriate layer thicknesses, a reduced transmission of solar heat.

The process may additionally comprise a heat treatment step wherein the heat-treatable low emissivity coated glass is subjected to a temperature in the range 400°C to 750°C in an oxidising atmosphere, which is usually directed to the production of bent and/or toughened coated glass. Surprisingly, the visible transmission of the heat-treatable low emissivity coated glass may be increased by the heat-treatment step.

In a further aspect, the invention provides a heat-treatable low emissivity coated glass comprising a glass substrate having a multilayer coating on a surface, said multilayer coating comprising a pyrolytically deposited underlayer, a vacuum deposited reflective metal layer and a vacuum deposited anti-reflection layer.

Preferably the underlayer comprises a silicon oxide, more preferable a silicon oxide containing carbon and advantageously, the underlayer will have a refractive index in the range 1.5 to 3 because an underlayer with a refractive index in this range enables a coating with a low visible light reflection to be produced (i.e. this range of refractive index is suitable for an anti-reflection underlayer). In most embodiments of the invention the underlayer has a thickness in the range 30 to 100 nm.

The reflective metal layer usually comprises silver or aluminium and preferably has a thickness in the range 5 to 30 nm, more preferably in the range 7 to 18 nm. At thicknesses lower than 7 nm the reflective metal layer may be discontinuous (this results from the growth mechanism of a layer and may occur even on a flat substrate) and will then not possess the properties of the bulk metal (resulting in poor infra red reflecting properties), whereas thicknesses higher than 18 nm may cause the coated glass to have too high a reflectivity to visible light.

The anti-reflection layer beneficially has a thickness in the range 30 nm to 90 nm.

Coated glass according to the invention will usually have a normal emissivity of below 0.2, preferably below 0.1. Coated glass according to the invention will usually have a normal emissivity of below 0.2, preferably below 0.1, after a heat treatment step wherein the coated glass is subjected to a temperature in the range 400 to 750°C in an oxidising atmosphere. Surprisingly, heat treatment tends to reduce the emissivity of those embodiments of the invention having a single reflective metal layer.

Coated glasses produced by the process of the present invention have uses in many areas of glass use including as a glazing pane in a multiple glazing unit or as a glazing pane in a laminated glass which will also comprise a polymer interlayer (usually of polyvinylbutyral) and a second glazing pane.

So that the invention may be better understood reference will now be made to the following drawings in which:-

Figure 1 illustrates schematically a section through a coated glass having a single reflective metal layer, the coated glass produced by a process according to the invention.

Figure 2 illustrates schematically a section through a coated glass having two reflective metal layers, the coated glass produced by a process according to the invention.

Referring to Fig. 1, a low emissivity coated glass 2 with a single silver layer 8 comprises a glass substrate 4, a pyrolytically deposited underlayer 6 of silicon oxide containing carbon of thickness 58 nm, a DC magnetron vacuum sputtered silver layer 8 of thickness 12 nm and a further layer of sputtered zinc oxide 10 of thickness 38 nm. The underlayer 6 is deposited by on line chemical vapour deposition. The underlayer 6 and the zinc oxide layer 10 act as anti-reflection layers.

Referring to Fig. 2, a low emissivity coated glass 12 with two silver layers 18 and 22 comprises a glass substrate 14, a pyrolytically deposited underlayer 16 of silicon oxide containing carbon of thickness 58 nm, and DC magnetron vacuum sputtered layers of: silver 18 of thickness 8.1 nm, zinc oxide 20 of thickness 85 nm, silver 22 of thickness 8.4 nm, and zinc oxide 24 of thickness 49 nm. A two silver layer low emissivity coating can provide greater infra red reflection compared to a single silver layer low emissivity coating and can also provide good solar control properties (i.e. reducing transmitted solar heat).

The invention is further illustrated by the following Examples, in which vacuum deposited coatings were applied to glass substrates coated with an underlayer of silicon oxide containing carbon.

The silicon oxycarbide (silicon oxide containing carbon) underlayer was deposited substantially as described in European patent application EP 0 275 662A by applying a flowing gaseous mixture to the upper surface of a glass ribbon during the float glass production process using a water-cooled graphite coater. The gaseous mixture was

applied at a position where the glass temperature was approximately 773°C as the ribbon advanced at a ribbon speed of 127 m/hr over the float bath. The gaseous mixture comprised nitrogen (as carrier gas, flow rate 0.92 kg/hr), monosilane ( $\text{SiH}_4$ , flow rate 0.06 kg/hr), ethylene (flow rate 1.84 kg/hr) and carbon dioxide (flow rate 2.31 kg/hr). The gaseous mixture was caused to flow parallel to the glass surface in the direction of movement of the glass under laminar flow conditions using an apparatus as described in GB patent specification 1 507 966 extending over the 2 m width of the glass ribbon, and with a path of travel extending approximately 0.1 m down-ribbon. The thickness of the glass was about 2.8 mm.

At the end of the float line, samples of the glass coated with the underlayer were cut from the glass ribbon. Coating layers were vacuum deposited on the samples at room temperature by sputtering or reactive sputtering using an Airco Temescal ILS 1600 sputtering plant and DC magnetron sputtering using metal targets of 99.9% purity or better. Deposition conditions for layers comprising silver, inconel, tin (IV) oxide and zinc oxide are described in Table 1.

The layer materials and layer thicknesses for the underlayer and the vacuum deposited coatings in the Examples are described in Table 2.

Table 3 describes the optical properties of the coated glasses of the Examples before and after (the values after heat treatment are in brackets) heat treatment to simulate toughening. The heat treatment consisted of subjecting the coated glass to a temperature of 640°C in air for 1.5 minutes. The visible transmission, reflection and the transmission and reflection colours in Table 3 were measured using an Hitachi U400 spectrophotometer and/or a Perkin Elmer 883 spectrophotometer, and calculated using

the methods described in International Standard ISO 12092:1994 (F) and other standard methods. The thicknesses of the layers were determined by computer fitting the spectra and by profilometry (Sloan Dektak II profilometer) after appropriate etching treatment (e.g. with aqueous hydrofluoric acid).

Table 1

	Layer Material			
	Silver	Inconel	Tin Oxide	Zinc Oxide
Power Density (W/cm <sup>2</sup> )	0.61	0.36	3.6	3.8
Gas Pressure (10 <sup>-3</sup> mbar)	9.3	11.8	6.7	6.8
Gas Composition (%)				
Ar	100	100	0	30
O <sub>2</sub>	0	0	100	70
Target - Substrate Distance (cm)	11	11	11	11
Substrate speed (cm/s)	2.7	2.9	3.1	3.1
Number of passes to obtain:	8	8	10	10
Thickness (Å)	102	10	362	340

Table 2

Layers	Example 1	Example 2	Example 3	Example 4
Silicon Oxide underlayer (nm)	58	58	58	58
First Silver Layer (nm)	11.9	8.1	11.4	7.9
First Inconel Layer (nm)	-	-	0.65	0.56
First Dielectric Layer (nm)	38 (ZnO)	85 (ZnO)	42 (SnO <sub>2</sub> )	83 (SnO <sub>2</sub> )
Second Silver Layer (nm)	-	8.4	-	8.8
Second Inconel Layer (nm)	-	-	-	0.54
Second Dielectric Layer (nm)	-	49 (ZnO)	-	48 (SnO <sub>2</sub> )

Table 3

	Example 1	Example 2	Example 3	Example 4
	Value before (after) heat treatment	Value before (after) heat treatment	Value before (after) heat treatment	Value before heat treatment
Visible Transmission %	76.3 (78.2)	74.1 (74.9)	74.5 (78.1)	73.2
Visible Reflection %	9.5 (9.1)	5.4 (5.2)	10.7 (9.2)	6.4
Transmission Colour				
a*	-4.2 (-3.9)	-3.9 (-4.2)	-5.1 (-3.4)	-4.6
b*	5.3 (4.9)	5.1 (5.4)	7.2 (7.4)	6.7
L	91 (92)	88 (88)	89 (91)	86.2
Reflection Colour				
a*	8.2 (7.9)	3.1 (3.5)	10.4 (8.9)	3.4
b*	-3.2 (-3.8)	2.5 (3.2)	-5.3 (-4.8)	5.5
L	35.2 (33.5)	31.2 (29.5)	38.7 (34.5)	30.2
Normal Emissivity	0.072 (0.069)	0.060 (0.065)	0.076 (0.072)	0.066

Claims

1. A process for the production of a heat-treatable low emissivity coated glass that comprises the steps of
  - a) depositing an underlayer onto a glass substrate and
  - b) subsequently depositing a reflective metal layer by a vacuum deposition method, characterised in that the underlayer is deposited by a pyrolytic deposition process.
2. A process according to claim 1 wherein the reflective metal layer is deposited directly on the underlayer.
3. A process according to claim 1 or 2 wherein the underlayer comprises a silicon oxide.
4. A process according to claim 1-3 wherein the underlayer comprises a silicon oxide containing carbon.
5. A process according to claims 1-4 wherein the pyrolytic deposition of the underlayer comprises contacting the glass substrate with a fluid mixture containing a silicon source, an oxygen source and a carbon source under conditions such that a silicon oxide layer, preferably containing carbon, is deposited.



6. A process according to claim 5 wherein the fluid mixture is a vapour mixture.
7. A process according to claim 1-3 wherein the underlayer comprises silicon oxide containing nitrogen.
8. A process according to any preceding claim wherein the underlayer is deposited on the glass substrate when the glass substrate is at a temperature in the range 450°C to 800°C.
9. A process according to any preceding claim wherein the underlayer is deposited on the glass substrate when the glass substrate is at a temperature in the range 600°C to 780°C
10. A process according to any preceding claim wherein the underlayer is deposited on to a glass ribbon during the float glass production process at substantially atmospheric pressure.
11. A process according to claim 10 wherein the glass ribbon is cut into sheets after deposition of the underlayer.
12. A process according to any preceding claim wherein the reflective metal layer comprises silver or aluminium.

13. A process according to any preceding claim wherein an anti-reflection layer is deposited by a vacuum deposition process on to the coated glass after deposition of the reflective metal layer.
14. A process according to claim 13 wherein the anti-reflection layer comprises a metal oxide.
15. A process according to claim 13 or 14 wherein the anti-reflection layer comprises zinc oxide or tin oxide.
16. A process according to claim 13-15 wherein a second reflective metal layer and a second anti-reflection layer are sequentially deposited by a vacuum deposition process after deposition of the first anti-reflection layer.
17. A process according to any preceding claim additionally comprising a heat treatment step wherein the heat-treatable low emissivity coated glass is subjected to a temperature in the range 400 to 750°C in an oxidising atmosphere.
18. A process according to claim 17 wherein the heat treatment step is directed to the production of bent and/or toughened coated glass.
19. A process according to claim 17 or 18 wherein the visible transmission of the coated glass is increased by the heat-treatment step.

20. A coated glass produced by a process according to any preceding claim.
21. A heat-treatable low emissivity coated glass comprising a glass substrate having a multilayer coating on one surface, said multilayer coating comprising a pyrolytically deposited underlayer, a vacuum deposited reflective metal layer and a vacuum deposited anti-reflection layer.
22. A coated glass according to claim 21 wherein the underlayer comprises a silicon oxide.
23. A coated glass according to claim 22 wherein the underlayer comprises a silicon oxide containing carbon.
24. A coated glass according to claim 21-23 wherein the underlayer has a refractive index in the range 1.5 to 3.
25. A coated glass according to claim 21-24 wherein the underlayer has a thickness in the range 30 to 100 nm.
26. A coated glass according to claim 21-25 wherein the reflective metal layer has a thickness in the range 5 to 30 nm.

27. A coated glass according to claim 26 wherein the reflective metal layer has a thickness in the range 7 to 18 nm.
28. A coated glass according to claim 21-27 wherein the anti-reflection layer has a thickness in the range 30 nm to 90 nm.
29. A coated glass according to claim 21-28 wherein the coated glass has a normal emissivity of below 0.2.
30. A coated glass according to claim 21-29 wherein the coated glass has a normal emissivity of below 0.1.
31. A coated glass according to claim 21-30 wherein the coated glass has a normal emissivity of below 0.2 after a heat treatment step wherein the coated glass is subjected to a temperature in the range 400 to 750°C in an oxidising atmosphere.
32. A coated glass according to claim 21-31 wherein the coated glass has a normal emissivity of below 0.1 after a heat treatment step wherein the coated glass is subjected to a temperature in the range 400 to 750°C in an oxidising atmosphere.
33. A multiple glazing unit comprising a first glazing pane of a coated glass according to claim 20-32 and a second glazing pane.

34. Laminated glass comprising a first glazing pane of a coated glass according to claim 20-32, an interlayer and a second glazing pane.
35. A process for producing coated glass substantially as herein described with particular reference to the Examples 1-4.

AbstractImprovements in Coating Glass

A process for the production of a heat-treatable low emissivity coated glass that comprises the steps of depositing an underlayer onto a glass substrate and subsequently depositing a reflective metal layer by a vacuum deposition process, wherein the underlayer is deposited by a pyrolytic deposition process. Preferably an anti-reflection layer is deposited by a vacuum deposition process on to the coated glass after deposition of the reflective metal layer. The underlayer may comprise a silicon oxide, the reflective metal layer may comprise silver and the anti-reflection layer may comprise a metal oxide, especially tin oxide or zinc oxide. The coated glass preferably has an emissivity of below 0.2 after heat treatment in an oxidising atmosphere.

Figure 1

1/1

Fig.1.

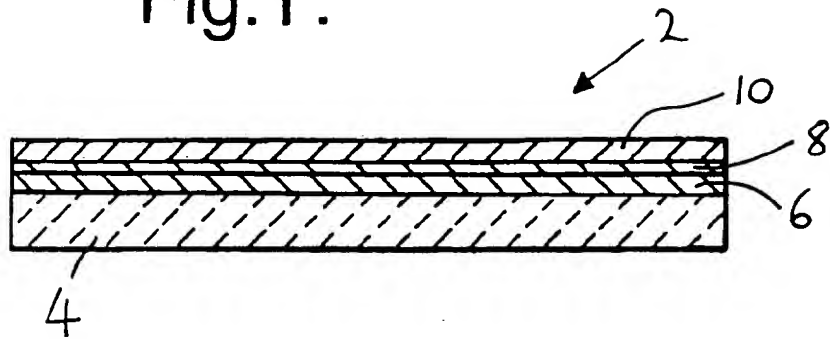


Fig.2.

